

Live GPS Tracking and Mapping Solution

State of the Art - All made in Sweden

Use the combination of the Swedish made GPS Trackers and the Swedish developed Mapping Solution GPSGate. This is a well used concept!



GPS Mapping prices


The Mapping Solution is called GPSGate and may be purchased straight from the manufacturers webpage (www.gpsgate.com) at a very low price.

GPSGate Server User License will cost you approximately 7.50 €/GPS device every month. The Server is hosted at GPSGate in Stockholm, Sweden.

7.50 €/GPS device every month includes:


- Free support and updates for 12 months
- Free access to use Google Maps in GPSGate

Please ensure yourself about the latest price and latest information on the manufacturers webpage.

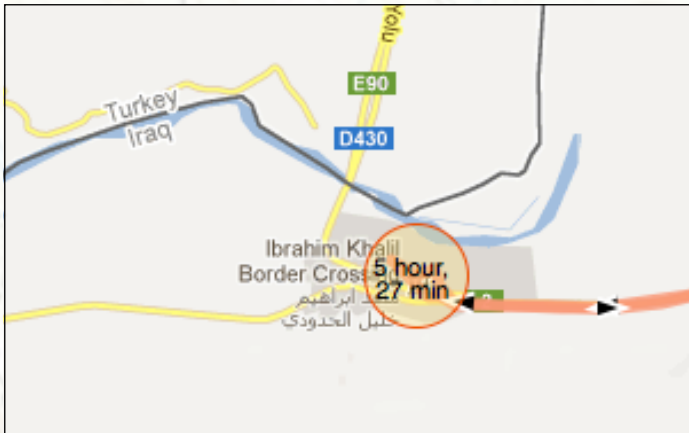

The GPSGate will show you how long time the Device has been on one place.

The GPSGate will alarm is the Device has entered, or exited, a unauthorized zone.

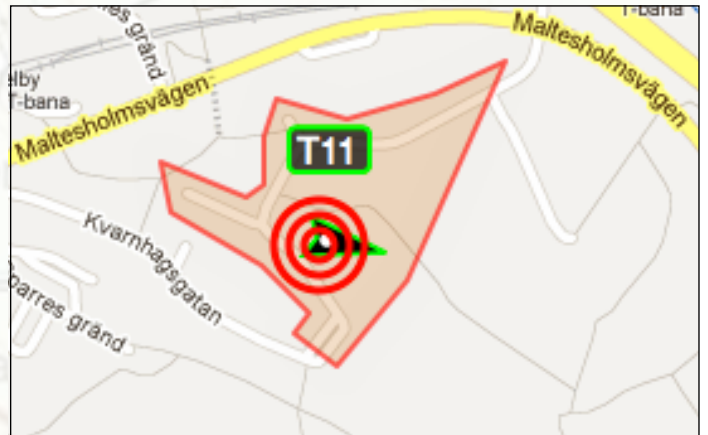

You can set the GPSGate to be alert no many Geofence zones at the same times.

Personal Alarm SRT306

Alarm

When the alarm button is pressed an operator receives information about the position and identity of the individual in distress, while at the same time the SRT306 places a voice telephone call to the operator.

Timer alarm

The unit can be set to automatically send an alarm after a certain time period should the user be unconscious or rendered unable to send an alarm herself.


Call Button

In addition to the alarm button the unit is equipped with a call button. When pushed the unit places a voice call to a preset number. The call button offers an alternative in situations of less than utmost emergency.



Features


1. Speaker and microphone
2. Accelerometer for vibration and motion detection
3. Quadband GSM/GPRS
4. GPS with SiRFstarIV
5. Supports GeoFencing
6. Water Proof (IP54)
7. Superior battery lifetime (44 hours)
8. Intelligent power saving mode
9. Sends low battery alarm
10. Small and handy size: 90x46x21,5 mm
11. Wight 100g
12. Status LEDs
13. USB rechargeable

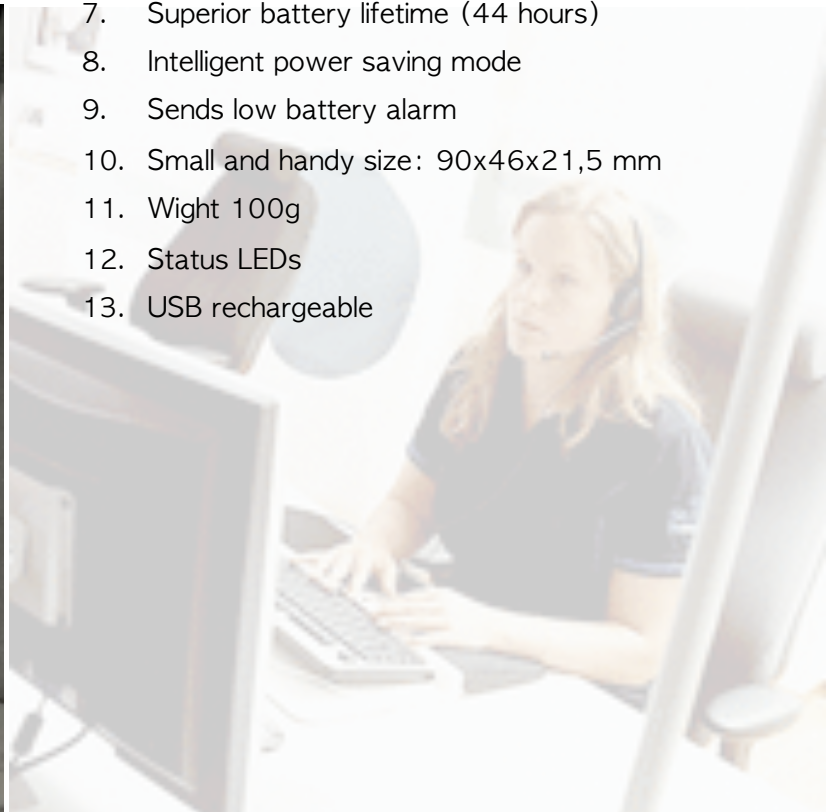

SRT Package Tracking

Alarm

This unit is made for tracking packages. The sensor is delivered with suitable sensors that detects if a package is opened. This makes it possible to receive an alarm via SMS or via Mail at the moment when the packages is beeing opened by an unauthorized.

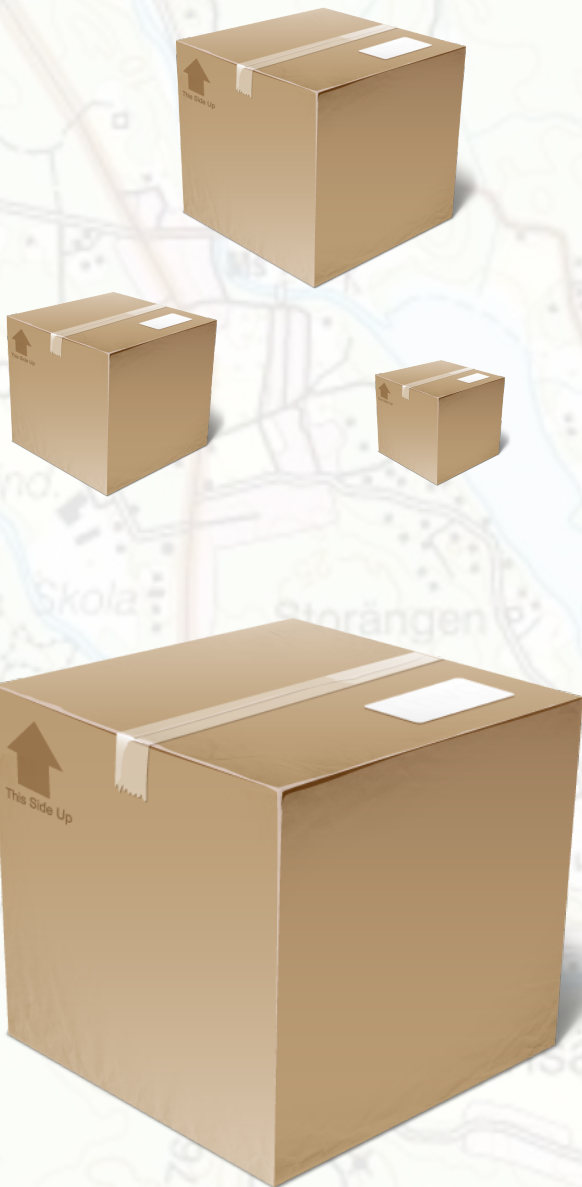

Features

1. Anti Sabotage sensor
2. GPS with SiRFstarIV
3. Small size; 111x57x15 mm with infrared detector and antennas
4. Up to 3 months battery lifetime
5. Sends low battery alarm
6. Microphone
7. Vibration sensor
8. Live audio
9. Weight: 100g
10. Geofencing
11. IR sensor (optional)
12. Light sensor (optional)
13. Temperature sensor (optional)
14. Chargeable through USB interface
15. Configurable through USB interface or SMS
16. Produced upon request

Sensor Alarm SRT399

Alarm

When the alarm button is pressed an operator receives information about the position and identity of the individual in distress, while at the same time the SRT399 places a voice telephone call to the operator.

Motion detector

Equipped with a motion detector sensor the SRT399 can detect movements within a 7 meter radius. Once movement is detected the unit can send an alarm to three different recipients.

Vibration sensor

As soon as the unit detects vibrations it sends an alarm.


Get live audio

The SRT399 enables you to get a live audio feed from the unit. Let the unit call you up in case of an alarm or call it up yourself at any time.



Features

1. Motion detector
2. Vibration sensor
3. GPS with SiRFstarIV
4. Small size; 111x57x15 mm with infrared detector and antennas
5. Up to 3 months battery lifetime
6. Various power saving modes
7. Sends low battery alarm
8. Metal encasing
9. Microphone
10. Live audio
11. Weight: 107g
12. Temperatur sensor (optional)
13. Chargeable through USB interface
14. Configurable through USB interface or SMS

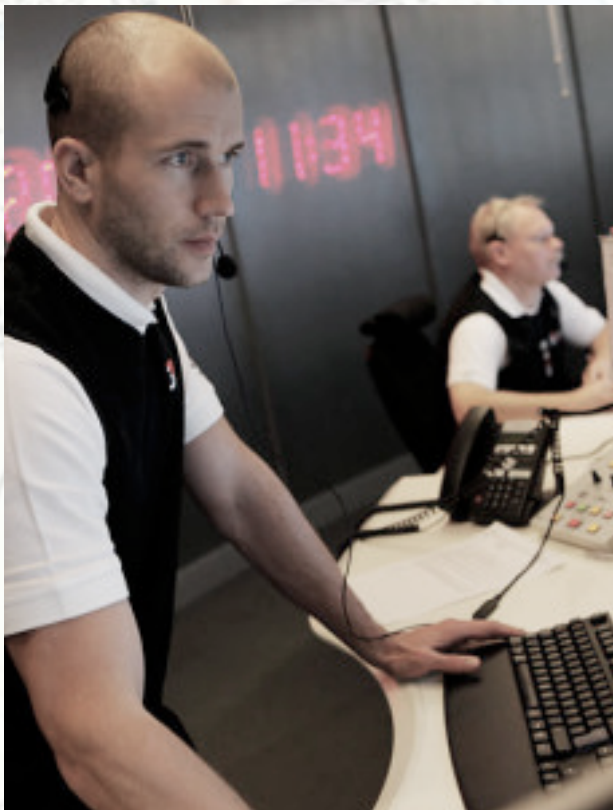

Vehicle Tracker SRT278

Alarm

When alarm button is pressed the emergency service center receives information about the individual in distress along with his or her geographical position. At the same time the alarm unit automatically places a telephone call to the service center operator. This helps the operator to make a proper assessment of the situation.

Breath alcohol ignition interlock device

Connect the SRT278 to an external breath alcohol ignition interlock device and receive an SMS if the driver's breath should give a positive result.

Car burglar alarm

The SRT278 can be connected to the car burglar alarm. Should the car burglar alarm be activated the SRT278 will send an alarm..



Features

1. Developed in Sweden
2. Speaker and microphone
3. Quadband GSM/GPRS
4. GPS with SiRFstarIII
5. Cost efficient communication protocol
6. Tough aluminium casing
7. Small size; 90x59x23,5 mm
8. Weight: 130g



NEO 320

The mobile sensor includes numerous of configuration features.



Ready to travel!

Features

What you need - nothing else,

- 1 SMS warning when battery is low
- 2 Long battery life, up to 10-40 days (ULP)
- 3 Small! Only 10 x 5 x 2 cm
- 4 110-240V charger included (12/24V optional)
- 5 Supports 9 different alarm formats
- 6 Ready to be connected to an alarm monitoring center
- 7 Optional GPS receiver
- 8 Optional infrared sensor mounted on a 30 cm cable
- 9 Optional unit delivered in a ruggedized casing



NEO 2900 Custom

A virtual smorgasbord of alarm possibilities!
We will customize your 2900 to your specific needs.

NEO 2900 allows you to connect external detectors, flashing lights, sirens, or the combination of detectors you need. We can manufacture small series of special alarms at very good prices and with a short delivery time.

Simply explain to us what needs you have, and we will suggest a solution for you.

The alarm on the above image is a temperature alarm with the intended use of monitoring transports of medicines. When the alarm is activated the alarm monitoring centre will also receive the vehicle's position (GPS).



Features

Impressive alarm possibilities

- 1 Up to 16 I/O. The standard is 8 in + 8 out (500mA)
- 2 Heavy-duty charger, larger battery
- 3 Relay output no/nc 2a (siren, flashing lights...)
- 4 1 - 2 analogue inputs for measurement
- 5 Input for 4-20mA industry standard sensors
- 6 Level sensor (tank/diesel alarm)
- 7 Can be equipped with a GPS
- 8 Can be equipped with an accelerometer
- 9 Can be equipped with a camera
- 10 Can be equipped with a display
- 11 ... and a few more things



NEO 2900 Plus

This model has added functionalities and longer operating time. In addition to the IR detector this alarm has a vibration sensor and double batteries.

In addition to the IR detector this alarm also has a built-in vibration sensor and a relay output for connection to a siren. A larger battery doubles the operating time.

The rugged alarm case

A high IP classification ensures longevity and high reliability. The electronics are protected against the ingress of dust particles and liquids. The alarm withstands water being flushed over it and being cleaned with disinfectant cleaners/alcohol.



Features

- 1 IR detector (range 7 meters)
- 2 Relay output no/nc 2a (siren, flashing lights...)
- 3 Vibration Sensor
- 4 Heavy-duty charger, larger battery
- 5 240V charger included (12/24V optional)
- 6 Alerts up to 7 receivers
- 7 Normal operation over 30 days
- 8 ULP operation (Ultra Low Power) approx. 9-12 months
- 9 SMS warning when battery is low
- 10 Comes programmed and ready to use



GSM HydroLarm

Specifically designed for diesel depots. The pressure sensor in the alarm detects decreases or increases of liquid levels and sends an alarm.

The level sensor is placed on the bottom of the fuel tank. If the liquid level varies by a pre-specified value, an alert is sent to the recipients of your choice and/or your alarm monitoring centre.

If someone touches the alarm or if the cable to the level sensor is cut, it sends a sabotage alarm.



Features

- 1 level sensor and 10-meter cable (range 0-3500mm)
- Sends an alarm if the cable is broken when the alarm is turned on
- Powerful built-in battery
- 240V charger included (12/24V optional)
- Alerts up to 7 receivers (GSM)
- Normal operation over 14 days (GSM module always on)
- ULP operations (Ultra Low Power) approx. 6 months
- SMS warning when battery is low
- Can be on a constant power supply
- Comes programmed and ready to use
- Can be connected do any alarm monitoring center
- Developed in Sweden



NEO 2900 Basic

The basic model has an attached IR detector, something that many customers request - simplicity, good price and functionality.

The alarm has an infrared sensor mounted on a 30 cm long cable. The basic model has no other sensors because with this model we have focused on how it is used most.

Direct Alarm

Amigo NEO 2900 can be programmed to directly alarm multiple receivers through an SMS or a call. Security companies can, in certain cases, authorize the alarm to be programmed to directly send an alarm to a security guard’s mobile phone.

Alarm monitoring centre

The alarm is normally connected to an alarm monitoring centre. NEO 2900 is approved and supports many alarm formats; it can send both direct alarms and to an alarm monitoring centre.



Features

What you need - nothing else,

- 1 IR detector (range 7 meters)
- 2 Powerful built in battery
- 3 240V charger included (12/24V optional)
- 4 Alerts up to 7 receivers
- 5 Normal operation approx. 20 days
- 6 ULP operation (Ultra Low Power) approx. 6 months
- 7 SMS warning when battery is low
- 8 Comes programmed and ready to use
